
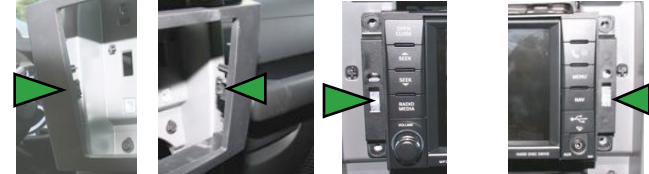


BlueGIG

Bluetooth, Voice recognition, Rear view Camera enabling for MyGIG

Please refer to owners manual for operation instructions. All features work as intended.

Installation Instructions – Jeep JK

Remove Radio	Fig. 2 - Radio Removal (Jeep JK depicted)
<ol style="list-style-type: none">1. Pop upper and lower covers. Clips are at the rear of the top cover and top of the lower cover.2. Remove (4) 7mm screws holding radio, A/C trim.3. Pull trim just enough to gain access to radio. No need to remove A/C Controls.4. Remove (4) 7mm screws securing radio, Remove radio.	
WARNING !!!	Fig. 3 - STRAY CLIP
<ol style="list-style-type: none">1. Metal clips used on the radio trim tend to enter the radio face once trim is removed. Inspect the radio trim, if a clip is missing it is IN THE RADIO FACE !!! Use needle-nose pliers to pull the stray clip through the clip opening on the radio.	
Wiring	Fig. 4 - Car Wiring
<ol style="list-style-type: none">1. Unplug Factory connector, connect to supplied Plug and play harness, reconnect all connectors including supplied microphone harness.2. Connect 8-pin MOLEX connector to BlueGIG.3. Re-assemble the vehicle, mount microphones on top of the radio cover, test for functionality.	